

### 2002-2004 Porsche 911 996.2 Front Radiator Grill Installation Procedure

**i** Note: it is best to protect your paint with painter's tape during the installation procedure. Though not necessary if care is taken.

### Procedure

1. Insert gill, as shown for the driver's side. The passenger's side has a temperature sensor that slightly complicates the install, we will address this later.





2. Cable ties are preinstalled and should be used to help position the grille. Grab both ends and pull the grille into position. Slide the grille towards the center of the car while pressing the flat end (pointed out below) behind the center plastic cowl.




The grille only needs to be slid about ¼ of an inch behind the cowl as shown.



3. The cable ties are hidden when installed. The middle bar is two pieces. You can split the bar a part and you will slip the cable ties in between. The receiving end of the cable tie will be on the bottom of the lower bar.



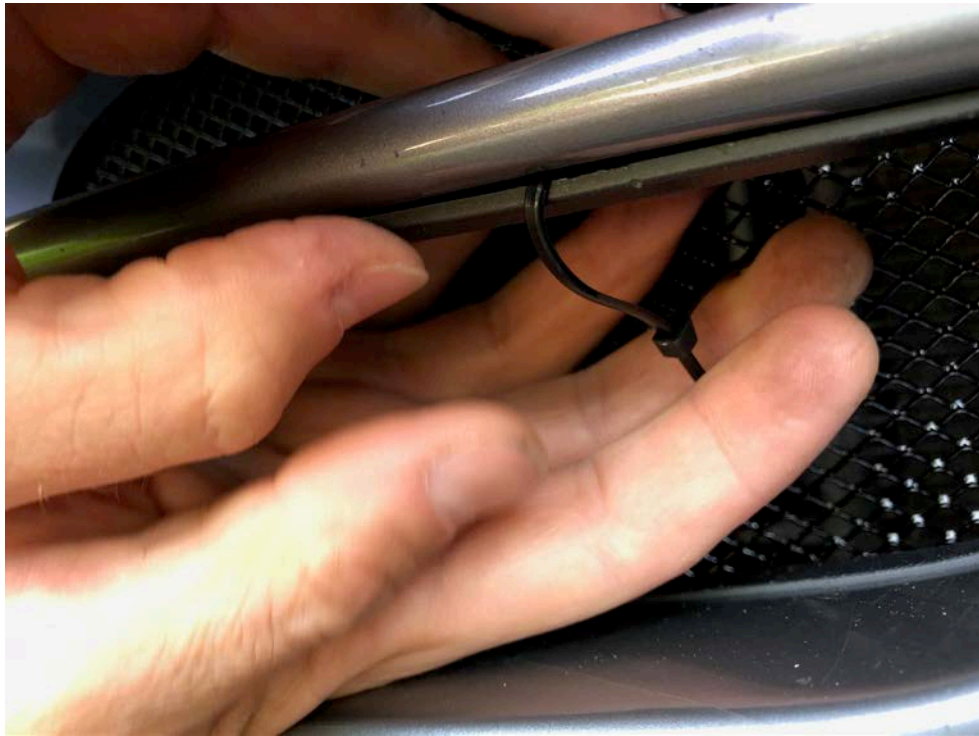

4. Loosely secure the cable ties. As you tighten the cable ties, keep pushing the receiving end of the cable tie towards the grille. Keeping the receiving end up against the grille as you tighten the cable tie. The cable tie should be snug when finished, too tight and it will warp the lower grill structure making it bend down.



5. Should look like the photo below. Then using a side cutter, clip off the extra cable tie tail.



6. Enjoy the finished product! Please post up reviews if you are happy with the look of the product!!

