

Radiator Grille Store

www.radiatorgrillestore.com
Naperville, IL 6064



2017-2019 Porsche 718 Front Radiator Grille Installation Procedure



Note: it is best to protect your paint with painter's tape during the installation procedure. Though not necessary if care is taken.




Tools Required

Gloves as the grilles can be sharp. Side cutters or cable tie cutters. Painter's tape for paint protection if you would like.

Procedure for Front Grilles

1. *NOTE: The current pattern we use for the 718 is the round hexagon to match the GT4 cars, this instructional depicts the diamond pattern.* Protect edges where the grill will be carefully inserted with painter's tape. Insert the grill through the top opening in the stock slated bumper strakes.

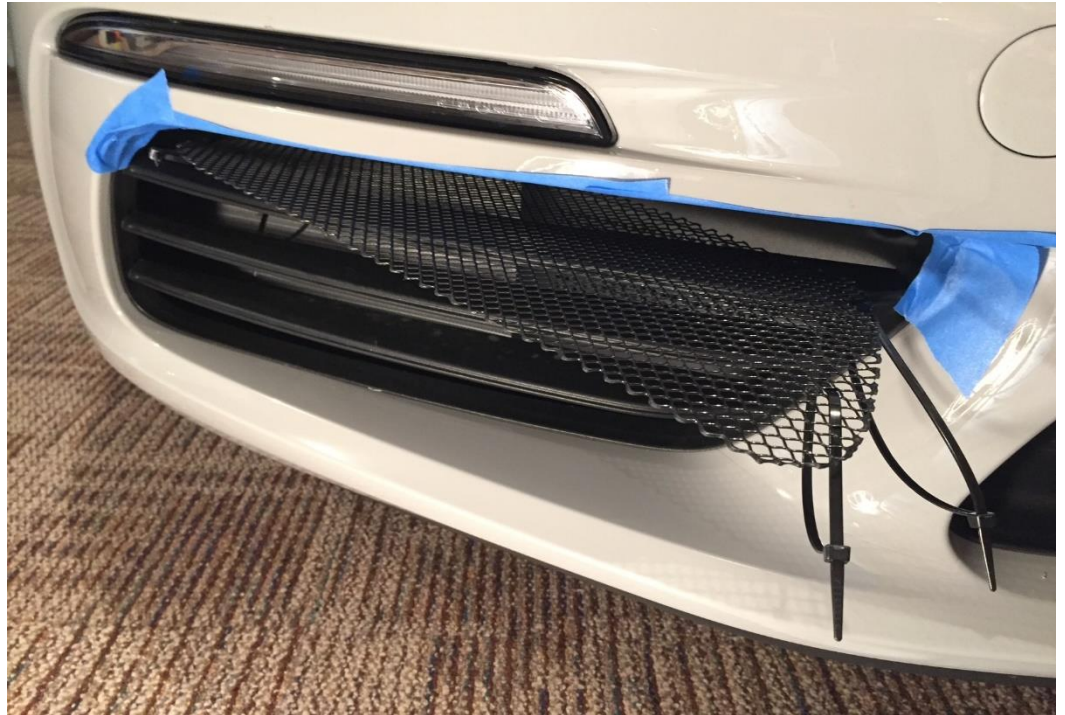

2. Cable ties are preinstalled for ease of installation (*NOTE: Cable ties may need repositioning prior to connect. Test fit prior to sinching cable ties*). Once the grill is inserted, you will be able to rotate the side in your hand into the cavity of the radiator intake. Connect all cable ties, but do not tighten. Once all are connected, rotate the receiver end of the cable tie towards the grill. Once done for all cable ties, tighten by holding the receiver end close to the grill and pull.



3. Clip off the ends of the cable ties. Complete!

